


CNS Model Thermocouple Standard Connectors -29 to 220 deg C



- Types, K, J, T, E, N, R/S available
- Material : Glass filled nylon
- Temperature : -29°C to 220°C
- Heavy Duty Construction
- Colour-Coded for ANSI
- Accepts Stranded or Solid Wire up to Size 14 AWG
- Optional : Wire clamp available

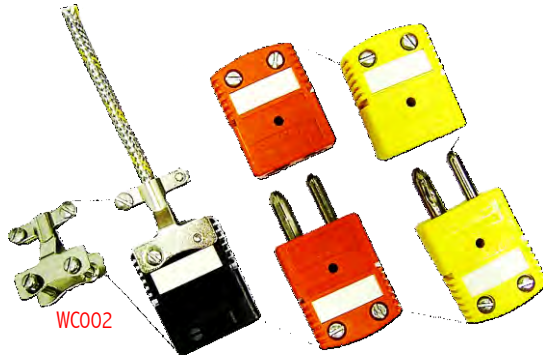

ADVANTAGES

- Quick Connect Contact Washers. As there is a spring effect at the contact terminal, it helps to release or tighten the wire to the terminal quick and easy
- Internal Wire Divider. The internal wire divider allows to loop the wire to the terminal of the connector properly and helps to secure the termination better
- Combination Philips / Slot Screws. The Philip / Slot screw when loosen will automatically hold to the plug without dropping. In this way, it reduces the possibility of losing the screw when doing termination.
- Removable / Reversible Write-On Windows. It helps to make indication for user when required
- Chisel Point Male Contact. It helps to ensure easy contact mating with the female connector
- Silicone Wire Grommet. This can be used to hold the wire properly and securely.

Calibration	Colour	Colour Code Ansi	Alloy		Connector Type	Order Code
			+VE	-VE		
K	YELLOW	Yellow	Chromel	Alumel	Male	CNS001-K
K	YELLOW	Yellow	Chromel	Alumel	Female	CNS002-K
J	BLACK	Black	Iron	Constantan	Male	CNS001-J
J	BLACK	Black	Iron	Constantan	Female	CNS002-J
T	BLUE	Blue	Copper	Constantan	Male	CNS001-T
T	BLUE	Blue	Copper	Constantan	Female	CNS002-T
E	PURPLE	Purple	Chromel	Constantan	Male	CNS001-E
E	PURPLE	Purple	Chromel	Constantan	Female	CNS002-E
N	ORANGE	Orange	Nicrosil	Nisil	Male	CNS001-N
N	ORANGE	Orange	Nicrosil	Nisil	Female	CNS002-N
R/S	GREEN	Green	Copper	RNX/SNX	Male	CNS001-RS
R/S	GREEN	Green	Copper	RNX/SNX	Female	CNS001-RS
U	WHITE	White	Copper	Copper	Male	CNS001-U
U	WHITE	White	Copper	Copper	Female	CNS002-U
Wire Clamp						
Wire Clamp					Suitable for CNS Model	WC002
Panel Mount Bracket						
Panel Mount Bracket (Metal)					Suitable for CNS Model	PMB002