


Fixed Process Connection w Connector (Male & Female) Thermocouple / RTD w extension wire

PFC
model

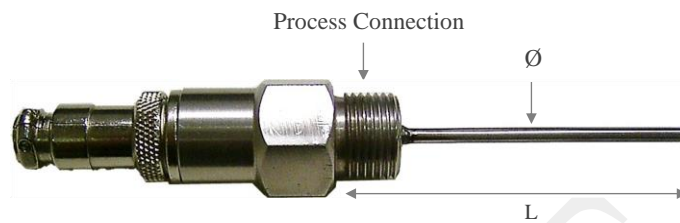

Feature

- ✓ Process Connection : 1/4" , 1/2" NPT or BSP
- ✓ Quick Connect

Thermocouple

- ✓ Type Available: K, J, T, E, N
- ✓ Sheath Material : SS316 / Inconel 600
- ✓ Sheath Dia : 1.0 to 6mm
- ✓ Hot junction: Grounded, Ungrounded
- ✓ Temperature range from: 0 to 1200 °C
- ✓ Thermocouple Connector (Male & Female)

RTD - Resistance Temperature Detector

- ✓ Type Available: PT100, PT500, PT1000
- ✓ 2 wire, 3 wire, 4 wire available
- ✓ Temperature range available from -200 to 600 °C
- ✓ Sheath Diameter: 1.6 to 6mm
- ✓ According to DIN EN 60751
- ✓ Alpha value = 0.00385 per ITS 90
- ✓ RTD Connector (Male & Female)