


Fixed Process Connection w Elbow Connector (Male & Female) & Interchangeable Inserts RTD

PFE
model

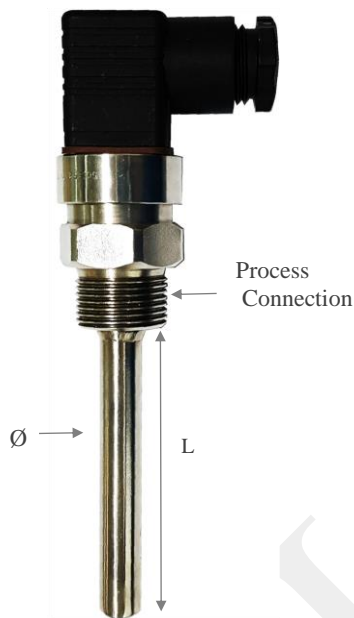

Feature

- ✓ Vibration Proof
- ✓ Quick Connect
- ✓ Interchangeable Inserts
- ✓ Up to 200 °C

Application

- ✓ For temperature measurement and regulation in piping systems and refrigeration plants on ship
- ✓ Use to measure gas, liquid media
- ✓ Use for small space area

RTD - Resistance Temperature Detector

- ✓ Type Available: PT100
- ✓ 2 wire, 3 wire, 4 wire available
- ✓ Temperature range available from -50 to 200 °C
- ✓ Sheath Diameter: up to 12.7mm
- ✓ According to DIN EN 60751
- ✓ Alpha value = 0.00385 per ITS 90
- ✓ RTD Connector (Male & Female) , Connector Max Temp 125°C
- ✓ Process Connection : 1/4", 1/2", 3/4", 3/8" NPT or BSP