

## THERMOCOUPLE ORDERING CODE

SMF1 - 1 - 2 - 3 4 5 - 6

SMF2 - 1 - 2 - 3 4 5 - 6

SMF3 - 1 - 2 - 3 4 5 - 6

Eg: SMF Model, SMF3, Type K, Temperature Range -50 to 200 deg C, Wire Length : 3 mtr, Wire Type : MFA, Class 2.  
Order Code : SMF3-K-U-3TCL2-0

### 1 CALIBRATION

Single

K: K

J: J

T: T

### 2 TEMPERATURE RANGE

U : -50 TO 200 °C

### 3 WIRE LENGTH

(Specify Wire Length Accordingly)

1: 1 Meter

2: 2 Meter

3: 3 Meter

### 4 WIRE TYPE

T : MFA/MFA

### 5 TOLERANCE

CL2 : Class 2 (Standard industrial class)

### 6 CONNECTORS (OPTIONAL ITEM)


0 : Nil

CN1 : Miniature connector

CN1WC : Miniature connector + wire clamp

CNS1 : Standard connector

CNS1WC : Standard connector + wire clamp

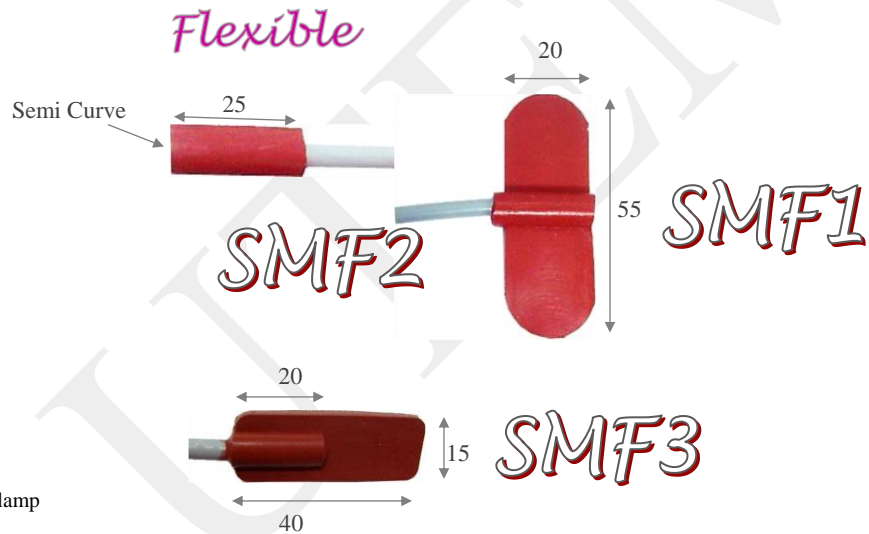

Remarks: Not all combination are available however we will offer the nearest to your requirement

## RTD ORDERING CODE

SMF1 - 1 - 2 3 - 4 5 6 - 7

SMF2 - 1 - 2 3 - 4 5 6 - 7

SMF3 - 1 - 2 3 - 4 5 6 - 7

Eg: SMF Model, SMF3, PT100 – 3 Wire, Temperature Range -50 to 200 deg C, Wire Length : 5 mtr, Wire Type : Silicon/Silicon, Class A.  
Order Code : SMF3-P1-3WU-5SCLA-0

**1 CALIBRATION**

Single

P1 : PT100

P5 : PT500

P10 : PT1000

**2 WIRE CONNECTION PER RTD**

2W: 2 WIRE

3W: 3 WIRE

4W: 4 WIRE

**3 TEMPERATURE RANGE**

U : -50 TO 200 °C

**4 WIRE LENGTH**

(Specify Wire Length Accordingly)

1: 1 Meter

2: 2 Meter

3: 3 Meter

**5 WIRE TYPE**

S : Silicon/Silicon

**6 TOLERANCE**

CLA: Class A

CLB : Class B (Standard industrial class)

**7 CONNECTORS (OPTIONAL ITEM)**


0 : Nil

CNA1 : Miniature connector

CNA1WC : Miniature connector + wire clamp

CNAS1 : Standard connector

CNAS1WC : Standard connector + wire clamp

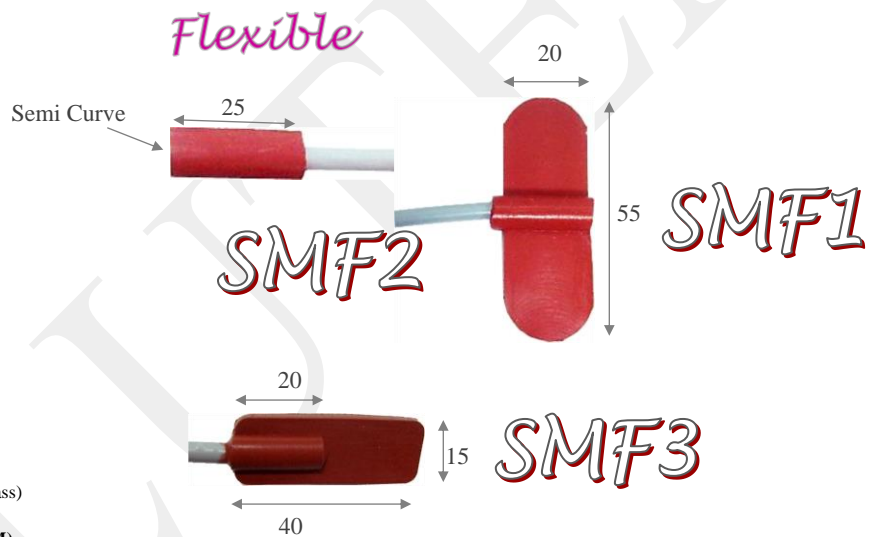

Remarks: Not all combination are available however we will offer the nearest to your requirement