


# K

## Multipair Thermocouple Wire UL Listed PLTC 300 Volt – Flame Redundant UP/ALPTW Model

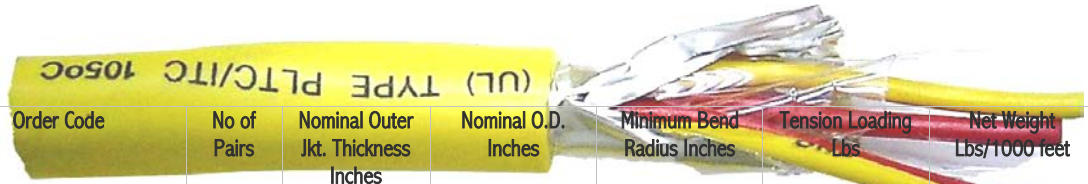

Order Code	No of Pairs	Nominal Outer Jkt. Thickness Inches	Nominal O.D. Inches	Minimum Bend Radius Inches	Tension Loading Lbs	Net Weight Lbs/1000 feet
20 AWG						
UP/ALPTW-20-XX	1	.037	.218	1.50	25	26
UP/ALPTW-02-20-XX	2	.042	.324	2.00	42	51
UP/ALPTW-04-20-XX	4	.042	.368	2.25	74	74
UP/ALPTW-08-20-XX	8	.053	.480	3.00	140	130
UP/ALPTW-10-20-XX	10	.053	.538	3.25	172	156
UP/ALPTW-12-20-XX	12	.053	.557	3.25	205	177
UP/ALPTW-16-20-XX	16	.064	.643	3.75	270	235
UP/ALPTW-20-20-XX	20	.064	.669	4.00	336	277
UP/ALPTW-24-20-XX	24	.064	.752	4.50	401	326
UP/ALPTW-36-20-XX	36	.074	.868	5.00	598	453
18 AWG						
UP/ALPTW-18-XX	1	.037	.234	1.50	35	33
UP/ALPTW-02-18-XX	2	.042	.352	2.00	61	62
UP/ALPTW-04-18-XX	4	.053	.424	2.50	113	103
UP/ALPTW-08-18-XX	8	.053	.525	3.25	217	170
UP/ALPTW-10-18-XX	10	.053	.590	3.50	269	205
UP/ALPTW-12-18-XX	12	.064	.634	3.75	321	248
UP/ALPTW-16-18-XX	16	.064	.706	4.25	425	313
UP/ALPTW-20-18-XX	20	.064	.734	4.50	528	373
UP/ALPTW-24-18-XX	24	.064	.828	4.75	632	441
UP/ALPTW-36-18-XX	36	.074	.956	5.75	944	639
16 AWG						
UP/ALPTW-16-XX	1	.037	.256	1.50	50	43
UP/ALPTW-02-16-XX	2	.053	.413	2.50	92	88
UP/ALPTW-04-16-XX	4	.053	.471	2.75	174	136
UP/ALPTW-08-16-XX	8	.053	.586	3.50	340	232
UP/ALPTW-10-16-XX	10	.064	.684	4.00	422	296
UP/ALPTW-12-16-XX	12	.064	.708	4.25	505	340
UP/ALPTW-16-16-XX	16	.064	.791	4.75	670	434
UP/ALPTW-20-16-XX	20	.064	.825	4.75	835	521
UP/ALPTW-24-16-XX	24	.074	.953	5.75	1000	636
UP/ALPTW-36-16-XX	36	.074	1.077	6.50	1497	903

- Replace 'XX' with desired calibration example KX, JX, NX etc

- Available up to 50 pair

**\*\* Type EX, JX, TX, R/SX, NX available**