


CC Model - Miniature Size Ceramic Ultra High Temp Thermocouple Connectors -29 to 650 deg C

- Types, K, J, T, E, N, U available
- Material : Ceramic
- Temperature : -29°C to 650°C
- Extra Heavy Duty Ceramic Construction
- Colour-Coded for ANSI
- Accepts Stranded or Solid Wire. Miniature size up to 20AWG.
- Optional : Wire clamp available
- For applications such as high vacuum furnaces where contamination would adversely affect the process.

ADVANTAGES

- Combination Philips / Slot Screws.
- Chisel Point Male Contact. It helps to ensure easy contact mating with the female connector
- Oversized Terminal Screws for Easy Wiring

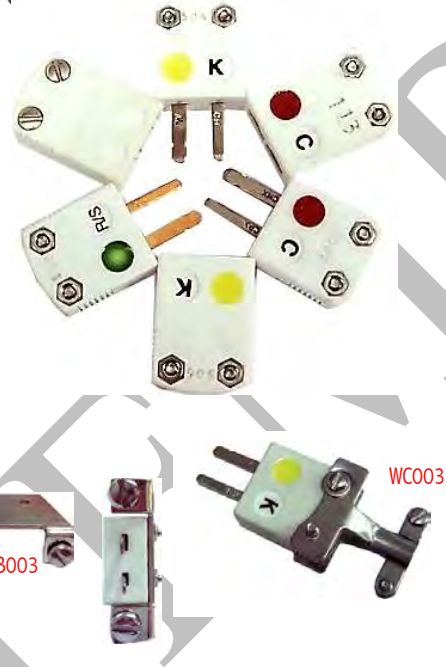

MINIATURE PLUG & SOCKET – CC Model						
Calibration	Colour	Colour Code Ansi	Alloy		Connector Type	Order Code
			+VE	-VE		
K	YELLOW	Yellow	Chromel	Alumel	Male	CC001-K
K	YELLOW	Yellow	Chromel	Alumel	Female	CC002-K
J	BLACK	Black	Iron	Constantan	Male	CC001-J
J	BLACK	Black	Iron	Constantan	Female	CC002-J
T	BLUE	Blue	Copper	Constantan	Male	CC001-T
T	BLUE	Blue	Copper	Constantan	Female	CC002-T
E	PURPLE	Purple	Chromel	Constantan	Male	CC001-E
E	PURPLE	Purple	Chromel	Constantan	Female	CC002-E
N	ORANGE	Orange	Nicrosil	Nisil	Male	CC001-N
N	ORANGE	Orange	Nicrosil	Nisil	Female	CC002-N
R/S	GREEN	Green	Copper	RNX/SNX	Male	CC001-RS
R/S	GREEN	Green	Copper	RNX/SNX	Female	CC002-RS
U	WHITE	White	Copper	Copper	Male	CC001-U
U	WHITE	White	Copper	Copper	Female	CC002-U
Panel Mount Bracket						
Panel Mount Bracket (Metal)					Suitable for CC model	PMB003
Wire Clamp						
Wire Clamp					Suitable for CC model	WC003

CCS Model Ceramic Ultra High Temp Thermocouple Connectors -29 to 650 deg C

- Types, K, J, T, E, N, U available
- Material : Ceramic
- Temperature : -29°C to 650°C
- Extra Heavy Duty Ceramic Construction
- Colour-Coded for ANSI
- Accepts Stranded or Solid Wire. Miniature size up to 20AWG. Standard Size up to 14 to 16 AWG.
- Optional : Wire clamp available
- For applications such as high vacuum furnaces where contamination would adversely affect the process.



ADVANTAGES

- Combination Philips / Slot Screws.
- Chisel Point Male Contact. It helps to ensure easy contact mating with the female connector
- Oversized Terminal Screws for Easy Wiring

STANDARD PLUG & SOCKET – CCS Model						
Calibration	Colour	Colour Code Ansi	Alloy		Connector Type	Order Code
			+VE	-VE		
K	YELLOW	Yellow	Chromel	Alumel	Male	CCS001-K
K	YELLOW	Yellow	Chromel	Alumel	Female	CCS002-K
J	BLACK	Black	Iron	Constantan	Male	CCS001-J
J	BLACK	Black	Iron	Constantan	Female	CCS002-J
T	BLUE	Blue	Copper	Constantan	Male	CCS001-T
T	BLUE	Blue	Copper	Constantan	Female	CCS002-T
E	PURPLE	Purple	Chromel	Constantan	Male	CCS001-E
E	PURPLE	Purple	Chromel	Constantan	Female	CCS002-E
N	ORANGE	Orange	Nicrosil	Nisil	Male	CCS001-N
N	ORANGE	Orange	Nicrosil	Nisil	Female	CCS002-N
R/S	GREEN	Green	Copper	RNX/SNX	Male	CCS001-RS
R/S	GREEN	Green	Copper	RNX/SNX	Female	CCS002-RS
U	WHITE	White	Copper	Copper	Male	CCS001-U
U	WHITE	White	Copper	Copper	Female	CCS002-U
Wire Clamp						
Wire Clamp					Suitable for CCS Model	WC003