

## HIGH TEMPERATURE CERAMIC HEATER

Heat up to 1000 °C

### HT MODEL




- ✓ MAX SURFACE TEMPERATURE : 1200°C
- ✓ SUITABLE FOR WASTE GAS

STANDARD MODEL		
ORDER CODE	POWER	VOLTAGE
HT-D1-001	5.5KW	100V

## SCREW IN SURFACE HEATER

Heat up to 180 °C

### SF MODEL

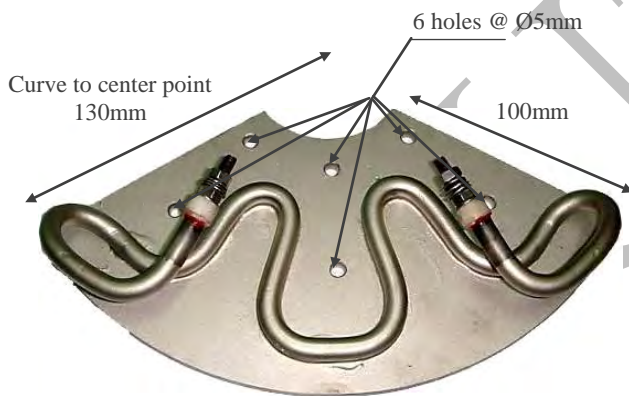

#### Curve Plate Dimension

- Curve to centre point = 130 mm
- Curve Width = 100mm
- Curve Thickness = 6 mm
- 6 Mounting Holes @ Diameter 5mm

## TEFLON HEATER

### TH-MODEL

It is designed for use to heat up liquid chemical at low temperature for chemical process. The heater is fully sealed with Teflon Tubing to prevent chemical attack. 3 meter Teflon Wire length is connected at the terminal.

#### How to Order

- ✓ Power = \_\_\_\_\_ W
- ✓ Voltage = \_\_\_\_\_ V
- ✓ Size = L x W xH

