

OCTRTD 8 CHANNEL RTD TEMPERATURE DATA LOGGER

Features


- ± 0.1 °C Calibrated Accuracy
- NIST Traceable
- Real time Operation
- Low Cost
- Programmable Start Time
- Reusable
- User-friendly
- Accepts 2, 3 and 4-wire RTD's

Benefits

- Simple Setup and Installation
- Minimal Long-Term Maintenance
- Long-Term Field Deployment


Applications

- Calibration Chamber Monitoring
- Process Verification/Validation
- Warehouse Monitoring
- Precision Temperature Monitoring
- HVAC
- Clean Rooms
- Medical/Pharmaceutical
- Museum Monitoring
- Environmental Studies
- Replace Costly Strip Chart Recorders

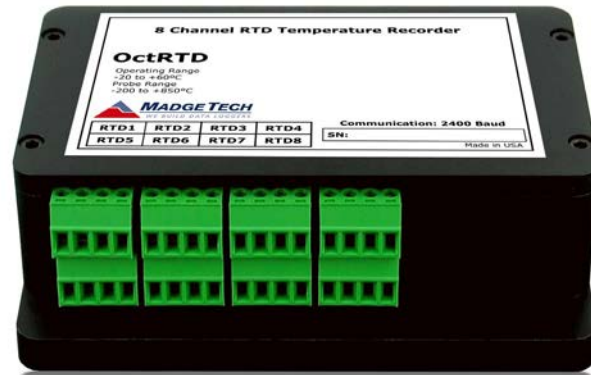

The OctRTD is an 8 channel, battery powered, stand alone, RTD based temperature recorder. This is an all-in-one compact, portable, easy to use device that will measure and record up to 10,922 measurements per channel. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and its small size allows it to fit almost anywhere. The OctRTD makes data retrieval quick and easy. Simply plug it into an empty COM or USB port and our user-friendly software does the rest.

MADGETECH DATA LOGGER SOFTWARE

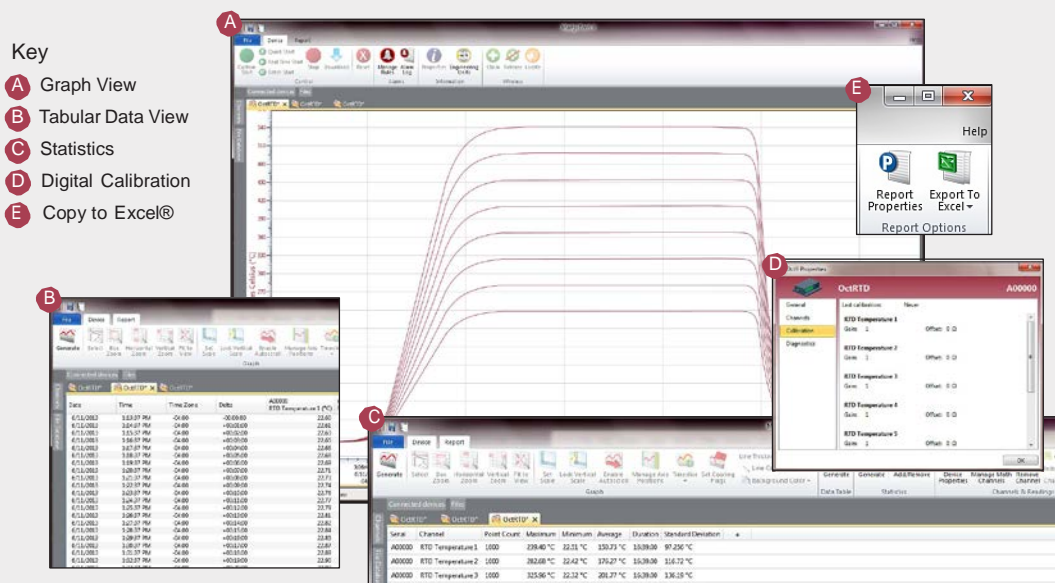

- Software Features:**
- Multiple graph overlay
 - Statistics
 - Digital calibration
 - Zoom in/ zoom out
 - Lethality equations (F0, PU)
 - Mean Kinetic Temperature
 - Full time zone support
 - Data annotation
 - Min./Max./Average lines
 - Data table view
 - Automatic report generation
 - Summary view
 - Multilingual

OCTRTD SPECIFICATIONS*

Temperature**

Measurement Range:	-200 °C to +850 °C (-328 °F to +1562 °F)
Resolution:	0.01 °C (0.018 °F)
***Calibrated Accuracy:	±0.1 °C @ 25 °C ambient
Specified Accuracy Range:	-200 °C to +850 °C (-328 °F to +1562 °F)

Resistance

Nominal Range:	0 to 500 Ω
Resolution:	0.001 Ω
***Calibrated Accuracy:	±0.030 Ω @ 25 °C ambient
Specified Accuracy Range:	0 to 500 Ω
Channels:	8
Input Connection:	Removable screw terminal; 2, 3 or 4 wire interface
Temperature Effect on Span:	< 2.5 ppm/°C; < 1.0 ppm/°C typical
**Temperature specifications based on ideal 100 Ω Pt RTD compliant with IEC 751 (1983) and ITS-90, 5000 Ω FSR (accuracy based on 36 in lead wire RTD with 4 wire configuration)	
***Calibrated accuracies based on standard MadgeTech calibrations for 0 to 200 Ω range.	
Start Modes:	Software programmable immediate start or delay start up to six months in advance, programmable in software

Real Time Recording:	May be used with PC to monitor and record data in real time
Memory:	10,922 readings per channel, for a total of 87,376 readings
Reading Rate:	1 reading every 2 seconds up to 1 reading every 12 hours
Calibration:	Digital calibration through the software
Calibration Date:	Automatically recorded within device
Battery Type:	9V lithium or alkaline battery included, user replaceable
Battery Life:	1 year typical
Data Format:	Date and time stamped °C, °F, K, °R; Ω
Time Accuracy:	±1 minute/month (at +20 °C (+68 °F), RS232 port not in use)
Computer Interface:	PC serial or USB (interface cable required); 2,400 baud
Software:	XP SP3/Vista/Windows 7/Windows 8
Operating Environment:	-20 °C to +60 °C (-4 °F to +140 °F), 0 %RH to 95 %RH non-condensing
Dimensions:	3.5 in x 4.4 in x 1.5 in (89 mm x 112 mm x 39 mm)
Weight:	15.9 oz (450 g)

BATTERY WARNING: FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT SHORT CIRCUIT, CHARGE, FORCE OVER DISCHARGE, CRUSH, PENETRATE, OR INCINERATE. BATTERY MAY LEAK OR EXPLODE IF HEATED ABOVE 80 °C (176 °F).

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

ORDERING INFORMATION

MODEL	DESCRIPTION
OCTRTD	Temperature Data Logger
IFC110	Software, manual and RS232 interface cable
IFC200	Software, manual and USB interface cable
*NIST	NIST Calibration Certificate
U9VL-J	Replacement battery for OctRTD

*To order the product with the NIST certificate add -CERT to the end of the part number.

ASK ABOUT
OUR OTHER
DATA
LOGGERS

Temperature
Humidity
Pressure
pH
Level
Shock
LCD Display
Pulse/Event/State
Current
Voltage Wireless
Intrinsically Safe
Spectral Vibration
Motion

For enquiries, please contact
sales@valutemp.com.sg
or visit our website at
www.valutemp.net

VALUTEMP PTE LTD (Singapore)

Tel: 65-6425 1635

sales@valutemp.com.sg