

Shock300


Tri-Axial Shock Data Logger




The Shock300 is a battery powered, stand alone 3-axis shock data logger. The Shock300 is specifically designed for documenting dynamic environments such as moving vehicles, trucks, containers, ships, etc. The device is also valuable in characterizing environments such as production and assembly lines of delicate electronics, IC fabrication, communications and computer components. This compact, portable, easy to use device will measure and record up to 4,192,254 measurements. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and its small size allows it to fit almost anywhere. The Shock300 makes data retrieval quick and easy. Simply plug it into an empty USB port and our user-friendly software does the rest.

The Shock300 provides simple ordering as one model which provides three acceleration ranges. The ranges are implemented on separate low-g and high-g accelerometers for excellent resolution and accuracy.


MadgeTech 4 Software Features

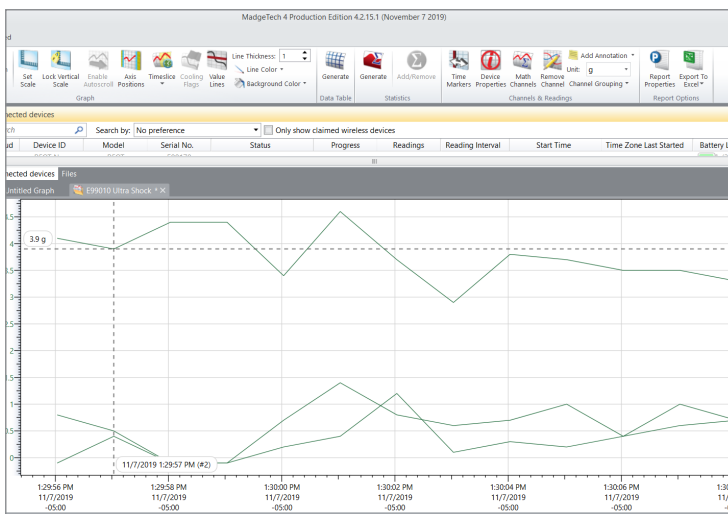

Graph View



Cooling Flags



Export to Excel

	Time	Time Zone	Delta
1	1:13:37 PM	-0400	-00:00:00
1	1:14:37 PM	-0400	+00:01:00
1	1:15:37 PM	-0400	+00:02:00
1	1:16:37 PM	-0400	+00:03:00
1	1:17:37 PM	-0400	+00:04:00
1	1:18:37 PM	-0400	+00:05:00
1	1:19:37 PM	-0400	+00:06:00
1	1:20:37 PM	-0400	+00:07:00
1	1:21:37 PM	-0400	+00:08:00
1	1:22:37 PM	-0400	+00:09:00
1	1:23:37 PM	-0400	+00:10:00
1	1:24:37 PM	-0400	+00:11:00

Tabular Data View

Perform actions when any of the following conditions are met:

Any device	Connected
	At a time
	Connected

When conditions are met, do the following:

Create reports	
----------------	--

Automation

Features

- Compact size
- 3-axis shock
- Fully configurable measurements
- Long life rechargeable battery
- Large capacity event memory
- Programmable start time
- Real-time operation
- CE compliant
- Separate low-g and high-g accelerometers

Applications

- Complete environmental shipment monitoring
- Shipping live cargo
- Aircraft turbulence measurement
- Endurance testing
- Assembly line monitoring
- Brake testing
- Laboratory drop testing
- Machinery monitoring
- Railcar coupling impacts

- Multiple graph overlay
- Statistics
- Digital calibration
- Zoom in/ zoom out
- Lethality equations (F0, PU)
- Mean Kinetic Temperature
- Full time zone support
- Data annotation
- Min./Max./Average lines
- Summary view

SPECIFICATIONS

Specifications are subject to change without notice. Specific warranty remedy limitations apply.

SHOCK				GENERAL	
Accelerometer Type	MEMS Semiconductor			Start Modes	Software programmable immediate start or delay start, up to 6 months in advance
Acceleration Range (g)	±15 g	±100 g	±300 g	Real Time Recording	May be used with PC to monitor and record instantaneous measurements in real time
Acceleration Resolution (g)	0.02 g	0.05 g	0.2 g	Memory	4,192,254 readings (1,397,418 per channel, all channels in use)
Calibrated Accuracy (g)	±0.3 g	±2.0 g	±6.0 g	Password Protection	An optional password may be programmed into the device to restrict access to configuration options. Data may be read out with the password.
Sampling Rate	1000 Hz			Calibration	Digital calibration through software
Accelerometer Freq. Resp.	>1000 Hz (15 g) >500 Hz (100 g, 300 g)			Calibration Date	Automatically recorded within device
Reading Rate	1024 Hz to 5 minutes for shock, selectable in software			Battery Type	Internal Lithium Ion pack, charger included
				Battery Life	20-90 days dependent on user settings (reading rate, trigger level, peak or instantaneous)
				Data Format	Date and time stamped gravities (g and mg), temperature (°C, °F, K, °R), humidity (%RH, mg/ml water vapor concentration), pressure (PSIA, inHg, mmHg, bar, atm, Torr, Pa, kPa, MPa)
				IP Rating	IP64
				Time Accuracy	10 seconds/month (at 0 °C to 50 °C)
				Computer Interface	USB-C cable required (included); 1Mbaud
				Operating System Compatibility	Windows XP SP3 or later
				Software Compatibility	Standard Software version 4.2.15.0 or later Secure Software version 4.2.14.0 or later
				Operating Environment	-20 °C to +60 °C (-4 °F to +140 °F), 0 %RH to 95 %RH non-condensing
				Dimensions	3.4 in x 1.7 in x 1.3 in (86 mm x 43 mm x 33 mm)
				Weight	8 oz (227 g)
				Material	Anodized aluminum
				Approvals	CE compliant EMC Directive 2014/30/EU RoHS Directive 2011/65/EU

BATTERY WARNING: FIRE, EXPLOSION AND SEVERE BURN HAZARD. DO NOT SHORT CIRCUIT, CRUSH, PENETRATE, INCINERATE OR DISASSEMBLE. AVOID TEMPERATURES ABOVE THE MAXIMUM OPERATING TEMPERATURE OF THE PRODUCT. DISPOSE OF PROPERLY. CHARGE ONLY WITH THE PROVIDED MADGETECH CHARGER, OR FROM OTHER USB POWER SOURCE VIA THE MADGETECH PROVIDED CABLE.

Ordering Information

Shock300	PN 902167-00	±15 g / ±100 g / ±300 g Tri-Axial Shock Data Logger, Battery Charger and USB Type C Interface Cable
----------	--------------	---