


ISOLATED/UNIVERSAL INPUT,
STANDALONE MULTI – CHANNEL DATA LOGGER

Stock Code: N13-240

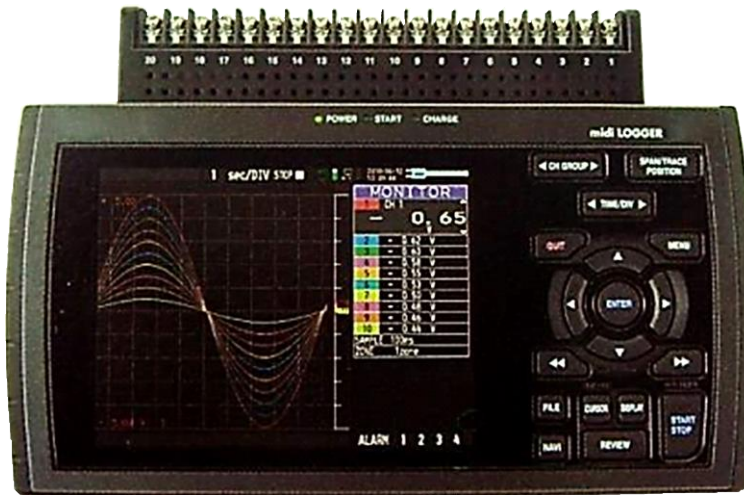

10 Channel Data Logger
HANDY-TYPE LOGGER

VOLTAGE

TEMP

HUMIDITY

PULSE

LOGIC

- 10 isolated channels, each with multifunction input
- Maximum sampling rate of up to 10ms
- Large easy-to-read 4.3-inch wide TFT color LCD
- Includes a ring memory function
- Easy operation and device set up
- Easy application software
- Other features
 - WEB & FTP server function.
Controlled by using the WEB browser, which also supports monitoring and transfer of signals and captured data.
 - FTP client function.
Captured data is periodically transferred to the FTP server for backup.
 - NTP client function.
The clock is periodically synchronized with the NTP server.

10 isolated channels, each with multifunction input


Its compact size contains an isolated input system which ensures that signals are not corrupted by inputs to other channels, thus eliminating wiring concerns. These multi-type inputs are suitable for voltage, temperature, humidity, pulse, and logic signals, enabling combined measurements of different phenomena like temperature/humidity and voltage.

Voltage	▶ Ranges from 20mV to 50V
Temp.	▶ Thermocouple types: K,J,E,T,R,S,B,N,W (WRe5-26)
Humidity	▶ 0 to 100%RH Using the optional humidity sensor (B-530 option)
Pulse	▶ 4 Channels * Accumulating , Instant or RPM
Logic	▶ 4 Channels *

*Select either Pulse input or Logic input and use the optional Logic/Alarm cable (B513 option)

4.3-inch WQVGA TFT color LCD

Utilizes a bright clear 4.3 inch wide TFT color LCD monitor (WQVGA: 480 x 272 dots). Makes it easy to read data in waveform or digital form and to check your measurement parameter settings.

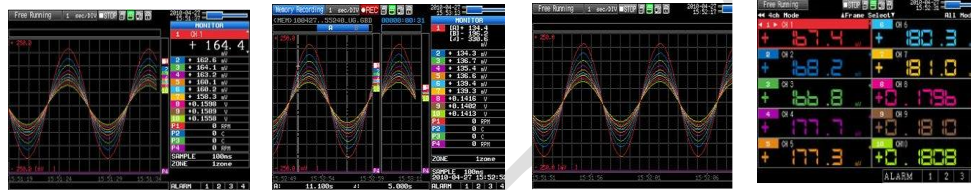

Waveform display (Analog+Digital)

Dual display (Current+Past)

Waveform display (Analog only)

Digital Display

Maximum sampling rate of up to 10ms

Provides faster sampling rates for voltage measurements. Can achieve 10ms sampling interval when limiting the number of channels in use.

Sampling interval	10ms	20ms	50ms	100ms	200ms	500ms	1s	2s
Number of channel	1	2	5	10	20	50	100	200
Measuring	Voltage	X	X	X	X	X	X	X
	Temp	N/A	N/A	N/A	X	X	X	X

- This chart is applicable when the captured data is saved in the GBD binary file format. Limited sampling speed is available when digital sensors are used as a remote monitoring device.

Supports large-size SD memory card, for reliable long term measurement

New series carries two SD memory card slots for storage device. The SDHC type SD memory card is supported up to 32GB. 4GB SD memory card comes as a standard accessory installed in the first slot

Capturing time (10 Analogue channels being used with Logic/Pulse inputs turned off)

Sampling interval	10ms	50ms	100ms	200ms	500ms	1s	10s
GBD format	41 days	88 days	103 days	207 days	Over 365 days	Over 365 days	Over 365days
CSV format	3 days	11 days	16 days	36 days	91 days	182 days	365 days

*The above figures are approximate. The sampling rate is limited by the number of channels in use.(10ms:1ch, 50ms: 5ch, 100ms: 10ch)

Alarm output function

Alarm signals can be output when alarm conditions occur.Four alarm output ports are fitted The Logic/alarm cable, (B-513 option), is needed to connect the alarm output ports.

USB Drive Mode

USB drive mode function enables data to be transferred to the PC from GL840 by drag & drop feature

Navigation function

Simple to use navigation screen allows setting operation for measurement and wireless LAN adaptor

Ring Capture function

The most recent data is saved when the memory is configured in ring memory mode (Number of capturing data is 1000 to 2000000 points)

Relay Capture function

Data is continuously saved to multiple files up to 2GB without losing any data until capturing is stopped when the memory is configured in the relay mode.

Hot-swapping the SD memory card

SD card can be replaced during data capturing when the sampling interval is 100ms or slower

Main Unit Specification

Item	Description	
Number of analog input channels	10 ch.	
External input output	Input ^{*8}	Trigger or Sampling input 1 ch, Logic or Pulse input 4 ch
	Output ^{*8}	Alarm output 4 ch
Sampling interval	10 ms to 1 h(in 10ms to 50ms, voltage only and limited channel), External	
Time scale	1 sec to 24 hour / division	
Trigger function	Trigger Action	Start or stop capturing data by the trigger
	Repeat Action	Off, On (auto rearmed)
	Trigger Source	Start: Off, Input signal, Alarm, External , Clock, Week or Time Stop: Off, Input signal, Alarm, External , Clock, Week or Time
	Combination	OR or AND condition at the level of signal or edge of signal
	Condition	Analog: Rising, Falling, Window-in, Window-out
		Pulse: Rising, Falling, Window-in, Window-out
		Logic: Rising, Falling
Alarm output	Output a signal when alarm condition occurs in the input signal	
Alarm output ^{*8}	4 channels, Output type: Open collector (pulled-up to 5 V by resistor 10 kΩ)	
Pulse input function ^{*8}	Accumulating count mode	Accumulating the number of pulses from the start of measurement Range: 50, 500, 5 k, 50 k, 500 k, 5 M, 50M, 500 M, counts/F.S
	Instant count mode	Counting the number of pulses per sampling interval Range: 50, 500, 5 k, 50 k, 500 k, 5 M, 50M, 500 M, counts/F.S
	Rotation count (RPM)	Counting the number pulses per second and then it is converted to RPM Range: 50 rpm, 500 rpm, 5 krpm, 50krpm, 500krpm, 5 Mrpm, 50 Mrpm, 500Mrpm/F.S
	Max. input pulse rate	50 k pulses/sec or 50k counts per sampling interval (16 bits counter is used)
Calculation function	Between channels	Addition, Subtraction, Multiplication and Division for analog input
	Statistical	Select two calculations from Average, Peak, Max., Min., RMS
Search function	Search for analog signal levels, values of logic or pulse or alarm point in captured data	
Interface to PC	USB 2.0 (Hi Speed)	
Storage device	Media	SD Memory card (Support SDHC, up to 32 GB
	Saved content	Captured data, setting conditions, Screen copy
Capturing mode	Mode: Normal, Ring, Relay Ring: Saves most recent data (Number of capturing data : 1000 to 2000000 points Relay: Saves data to multiple files without losing data until data capturing is stopped.	
Replay data (in GBD or CSV format)	Replays captured data that was saved	
Engineering scale function	Measured value can be converted to specified engineering unit Analog voltage: converts using four reference points (gain, offset) Temperature: converts using two reference points (offset) Pulse count: converts using two reference points (gain).	
Display	Size	4.3 inch color TFT (WVGA: 480 x 272 dots)
	Information	Waveform in Y-T with digital values, Waveform only, Digital values and statistics values
Operating environment	0 to 45 °C, 5 to 85 % RH (When operating with battery pack 0 to 40°C, charging battery 15 to 35°C)	
Power source	AC adapter (100 to 240 V, 50/60 Hz), DC power (8.5 to 24 V DC), DC drive cable is required) Battery pack- Mountable battery pack	
Power consumption	Max 36 VA or lower	
External dimensions (W x D x H)	Approx. 188 x 117 x 42 mm	
Weight	Approx. 500 g	

Software Specification

Item	Description	
Supported OS	Windows 8.1, 8 , 7, Vista (32bits and 64 bits edition)	
Functions	Real-time data capture, Replay data, Data format conversion	
Settings control	Input condition, capturing condition, Trigger/Alarm condition, Reports etec	
Controlled units	Up to 1000 channels total, Up to 4 groups (number of units is limited by model)	
Captured data	Save to PC	Saves captured data in real time (in GBD binary or CSV format)
	Save to logger unit	Saves to the SD memory card (in GBD binary or CSV format)
Displayed information	Analog waveforms, Logic waveforms, Pulse waveforms, Digital values	
Displayed modes	Y-T waveforms, Digital values, Report X-Y graph (specified period data, data reply only)	
Warning functions	Sends E-mail to the specified address when the alarms occur	
Statistical calculation	Max, Min, and Ave during data capturing	
Report functions	Creates the daily or monthly report automatically (can also export directly to Excel)	

Standard Accessories

Item	Description	Quantity
AC adapter	100 to 240 V AC, 50 / 60 Hz (with specified type of power cord)	1 set
CD-ROM	User's manual (PDF format), Application software	1 piece
Quick Start Guide		1 copy
SD Card	4 GB	1 piece

Options and Accessories

Item	Model number	Remarks
Battery pack	B-569	Rechargeable Lithium-ion battery (7.2 V, 2900mAh)
Input / Output cable	B-513	2m long (no clip on end of cable)
DC Drive cable	B-514	2m long (no clip on end of cable)

Analog input Specification

Item	Description		
Type of input terminal	Screw terminal (M3 screw)		
Input method	all channels isolated, balanced input scan channels for sampling, screw terminal M3		
Measurement range	Voltage	20, 50, 100, 200, 500 mV, 1, 2, 5, 10, 50 V, and 1-5 V/F.S.	
	Thermocouple	Thermocouple: K, J, E, T, R, S, B, N and W (WRe5-26)	
	RTD	N/A	
	Humidity	0 to 100% (using humidity sensor (B-530 optional), power is supplied to only one sensor)	
Filter	Off, 2, 5, 10, 20, 40 (moving average in selected number)		
Measurement accuracy*11	Voltage	0.1% of F.S	
	Temperature	Thermocouple	Measurement range
		R/S	0°C ≤ TS ≤ 100°C 100°C < TS ≤ 300°C R: 300°C < TS ≤ 1600°C S: 300°C < TS ≤ 1760°C
		B	400°C ≤ TS ≤ 600°C 600°C < TS ≤ 1820°C
		K	-200°C ≤ TS ≤ -100°C -100°C < TS ≤ 1370°C
		E	-200°C ≤ TS ≤ -100°C -100°C < TS ≤ 800°C
		T	-200°C ≤ TS ≤ -100°C -100°C < TS ≤ 400°C
		J	-200°C ≤ TS ≤ -100°C -100°C < TS ≤ 100°C 100°C < TS ≤ 1100°C
		N	0°C ≤ TS ≤ 1300°C
		W	0°C ≤ TS ≤ 2000°C
Reference Junction Compensation (R.J.C): ±0.5°C			
A/D Converter	ΣΔ type, 16 bits (effective resolution: 1/40000 of measuring full range)		
Maximum input voltage	Between +/- terminal	20mV to 2V range: 60 V p-p 5V to 100V range : 110 Vp-p	
	Between channels	60 V p-p	
	Between channel / GND	60 V p-p	
Withstand Voltage	Between channels	350 V p-p (1 minute)	
	Between channel(-)/GND	350 V p-p (1 minute)	